

Document version	Confidential
V2.0.1	

F3X36 Industrial Router Technical Specification




General

F3X36 Industrial Router is a kind of cellular terminal device that provides large data transfer function by public GPRS/CDMA/WCDMA/EVDO/LTE network.

It adopts high-powered industrial 32-bits CPU and embedded real time operating system. It supports RS232 (or RS485/RS422), Ethernet and WIFI port that can conveniently and transparently connect one device to a cellular network, allowing you to connect to your existing serial, Ethernet and WIFI devices with only basic configuration.

It has been widely used on M2M fields, such as self-service terminal industry, intelligent transportation, smart grid, industrial automation, telemetry, finance, POS, water supply, environment protection, post, weather, and so on.

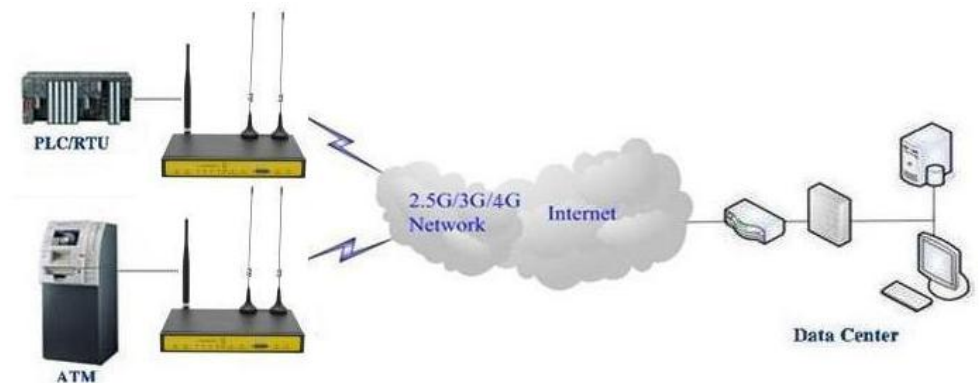

Product Feature

Design for Industrial Application

- ◆ High-powered industrial cellular module
- ◆ High-powered industrial 32bits CPU
- ◆ Support low-consumption mode, including sleep mode, scheduled online/offline mode, scheduled power-on/power-off mode(optional)
- ◆ Housing: iron, providing IP30 protection
- ◆ Power range: DC 5~36V

Stability and Reliability

- ◆ Support hardware and software WDT
- ◆ Support auto recovery mechanism, including online detect, auto redial when offline to make Router always online
- ◆ Ethernet port: 1.5KV magnetic isolation protection

- ◆ RS232/RS485/RS422 port: 15KV ESD protection
- ◆ SIM/UIM port: 15KV ESD protection
- ◆ Power port: reverse-voltage and over-voltage protection
- ◆ Antenna port: lightning protection(optional)

Standard and Convenience

- ◆ Support standard RS232(or RS485/RS422), Ethernet and WIFI port that can connect to serial, Ethernet and WIFI devices directly
- ◆ Support standard WAN port and PPPOE protocol that can connect to ADSL directly
- ◆ Support intellectual mode, enter into communication state automatically when powered

- ◆ Provide management software for remote management
- ◆ Support several work modes
- ◆ Convenient configuration and maintenance interface(WEB or CLI)

High-performance

- ◆ Support multiple WAN access methods, including static IP, DHCP, L2TP, PPTP,PPPOE,2.5G/3G/4G
- ◆ Support double link backup between LTE and WAN(PPPOE, ADSL)(optional)
- ◆ Support VPN client(PPTP, L2TP, IPSEC)(only for VPN version)
- ◆ Support VPN server(PPTP, L2TP, IPSEC)(only for VPN version)
- ◆ Support local and remote firmware upgrade,import and export configure file
- ◆ Support NTP, RTC embedded
- ◆ Support multiple DDNS provider service
- ◆ Support VLANs, MAC Address clone, PPPoE Server

- ◆ WIFI support 802.11b/g/n. support AP, client, Adhoc, Repeater, Repeater Bridge mode
- ◆ WIFI support WEP,WPA,WPA2 encryption,Support MAC address filter
- ◆ Support multiple online trigger ways, including SMS, ring and data. Support link disconnection when timeout
- ◆ Support APN/VPDN
- ◆ Support DHCP server and client, firewall, NAT, DMZ host , URL block, QoS, traffic statistics, real time link speed statistics etc
- ◆ Full protocol support , such as TCP/IP, UDP, ICMP, SMTP(optional), HTTP, POP3(optional), OICQ(optional), TELNET, FTP(optional), SNMP, SSHD, etc
- ◆ Schedule Reboot, Schedule Online and Offline,etc

Product Specification -----

Cellular Specification

ITEM	CONTENT
F3136 GPRS WIFI Industrial Router	
Standard and Band	EGSM 900/GSM 1800MHz, GSM 850/900/1800/1900MHz(optional) Compliant to GSM phase 2/2+ GPRS class 10, class 12(optional)
Bandwidth	85.6Kbps
TX power	GSM850/900: <33dBm GSM1800/1900: <30dBm
RX sensitivity	<-107dBm
F3236 CDMA WIFI Industrial Router	
Standard and Band	CDMA2000 1xRTT 800MHz, 450MHz(optional)
Bandwidth	153.6Kbps
TX power	<30dBm
RX sensitivity	<-104dBm
F3436 WCDMA WIFI Industrial Router	
Standard and Band	FDD-LTE 2600/2100/1800/900/800MHz, 700/1700/2100MHz(optional) DC-HSPA+/HSPA+/HSDPA/HSUPA/UMTS 850/900/2100MHz, 800/850/1900/2100MHz(optional) EDGE/GPRS/GSM 850/900/1800/1900MHz

	GPRS CLASS 10 GPRS CLASS 12
Bandwidth	FDD-LTE: Download speed 100Mbps, Upload speed 50Mbps DC-HSPA+: Download speed 42Mbps, Upload speed 5.76Mbps HSPA+: Download speed 21Mbps, Upload speed 5.76Mbps HSDPA: Download speed 7.2Mbps, HSUPA: Upload speed 5.76Mbps UMTS: 384Kbps
TX power	<24dBm
RX sensitivity	<-97dBm
F3636 CDMA2000 1xEV-DO WIFI Industrial Router	
Standard and Band	CDMA2000 1xEV-DO Rev A 800MHz, 800/1900MHz(optional), 450MHz(optional) CDMA2000 1xEV-DO Rev B 800/1900MHz(optional) CDMA2000 1xRTT, IS-95 A/B
Bandwidth	EVDO Rev. A: Download speed 3.1Mbps, Upload speed 1.8Mbps EVDO Rev. B: Download speed 14.7Mbps, Upload speed 5.4Mbps (optional)
TX power	<23dBm
RX sensitivity	<-104dBm
F3736 TD-LTE WIFI Industrial Router	
Standard and Band	TD-LTE 2600/1900/2300MHz(Band 38/39/40), 800/1400/1800MHz(Band 27/61/62)(optional) TD-SCDMA 2010/1900MHz(A/F frequency band, Band 34/39) GSM /GPRS/EDGE 900/1800/1900MHz
Bandwidth	TD-LTE: Download speed 61Mbps, Upload speed 18Mbps TD-HSPA+: Download speed 4.2Mbps, Upload speed 2.2Mbps TD-HSPA: Download speed 2.2Mbps, Upload speed 2.2Mbps
TX power	<23dBm
RX sensitivity	<-97dBm
F3836 FDD-LTE WIFI Industrial Router	
Standard and Band	FDD-LTE 2600/2100/1800/900/800MHz, 700/1700/2100MHz(optional) DC-HSPA+/HSPA+/HSDPA/HSUPA/UMTS 850/900/2100MHz, 800/850/1900/2100MHz(optional) EDGE/GPRS/GSM 850/900/1800/1900MHz GPRS CLASS 10 GPRS CLASS 12
Bandwidth	FDD-LTE: Download speed 100Mbps, Upload speed 50Mbps DC-HSPA+: Download speed 42Mbps, Upload speed 5.76Mbps HSPA+: Download speed 21Mbps, Upload speed 5.76Mbps HSDPA: Download speed 7.2Mbps, HSUPA: Upload speed 5.76Mbps UMTS: 384Kbps
TX power	<23dBm
RX sensitivity	<-97dBm
F3A36 LTE WIFI Industrial Router	
Standard and Band	FDD-LTE,TD-LTE,EVDO,WCDMA,TD-SCDMA,CDMA1X,GPRS/EDGE
Bandwidth	FDD-LTE: Download speed 100Mbps, Upload speed 50Mbps

	TD-LTE: Download speed 61Mbps, Upload speed 18Mbps DC-HSPA+: Download speed 42Mbps, Upload speed 5.76Mbps TD-HSPA+: Download speed 4.2Mbps, Upload speed 2.2Mbps EVDO Rev. A: Download speed 3.1Mbps, Upload speed 1.8Mbps
TX power	<23dBm
RX sensitivity	<-97dBm

WIFI Specification

Item	Content
Standard	IEEE802.11b/g/n
Bandwidth	IEEE802.11b/g: 54Mbps (max) IEEE802.11n: 150Mbps (max)
Security	WEP, WPA, WPA2, etc WPS (optional)
TX power	20dBm
RX sensitivity	<-72dBm@54Mbps

Hardware System

Item	Content
CPU	Industrial 32bits CPU
FLASH	16MB(Extendable to 64MB)
DDR2	128MB

Interface type

Item	Content
WAN	1 10/100 Mbps WAN port(RJ45), auto MDI/MDIX, 1.5KV magnetic isolation protection
LAN	4 10/100 Mbps Ethernet ports(RJ45), auto MDI/MDIX, 1.5KV magnetic isolation protection
Serial	1 RS232(or RS485/RS422) port, 15KV ESD protection Data bits: 5, 6, 7, 8 Stop bits: 1, 1.5(optional), 2 Parity: none, even, odd, space(optional), mark(optional) Baud rate: 2400~115200 bps
Indicator	"Power", "System", "Online", "SIM", " Local Network ", "WAN", "WIFI", "Signal Strength"
Antenna	Cellular: 2 Standard SMA female interface, 50 ohm, lightning protection(optional) WIFI: 1 Standard SMA male interface, 50 ohm, lightning protection(optional)
SIM/UIM	Standard 3V/1.8V user card interface, 15KV ESD protection
Power	Standard 3-PIN power jack, reverse-voltage and over-voltage protection
Reset	Restore the Router to its original factory default settings





Note: There may be different components and interfaces in different model, please in kind prevail.

Power supply

Item	Content
Standard Power	DC 12V/1.5A
Power range	DC 5~36V

Consumption

Working condition	Consumption
Standby	293~326mA@12VDC
Communication	310~554mA@12VDC
Schedule Shutdown	2.57~4.2mA@12DVC

Physical Characteristics

Item	Content
Housing	Iron, providing IP30 protection
Dimensions	207x135x28 mm
Weight	790g

Environmental Limits

Item	Content
Operating Temperature	-35~+75°C(-31~+167°F)
Storage Temperature	-40~+85°C (-40~+185°F)
Operating Humidity	95% (unfreezing)

Ordering Information

Model No.	Description	WAN	LAN	Cellular	WIFI	SIM/UIM
F3136	GPRS WIFI Industrial Router	1	4	1	1	1
F3236	CDMA WIFI Industrial Router	1	4	1	1	1
F3436	FDD-LTE & WCDMA WIFI Industrial Router	1	4	2	1	1
F3636	CDMA2000 1xEV-DO WIFI Industrial Router	1	4	1	1	1
F3736	TD-LTE WIFI Industrial Router	1	4	2	1	1
F3836	FDD-LTE WIFI Industrial Router	1	4	2	1	1
F3A36	LTE WIFI Industrial Router	1	4	2	1	1

